



Facility Condition Assessment

Lincoln - Lincoln Middle School

June 2017

152 Jenckes Hill Road, Lincoln, RI 02865





Introduction

Lincoln Middle School, located at 152 Jenckes Hill Road in Lincoln, Rhode Island, was built in 2006. It comprises 137,533 gross square feet. Each school across the district was visited three times during the Facility Condition Assessments by three teams of specialists in the spring/summer of 2016.

Lincoln Middle School serves grades 6 - 8, has 64 instructional spaces, and has an enrollment of 760. Instructional spaces are defined as rooms in which a student receives education. The LEA reported capacity for Lincoln Middle School is 1,000 with a resulting utilization of 76%.

For master planning purposes a 5-year need was developed to provide an understanding of the current need as well as the projected needs in the near future. For Lincoln Middle School the 5-year need is \$5,496,335. The findings contained within this report resulted from an assessment of building systems performed by building professionals experienced in disciplines including: architecture, mechanical, plumbing, electrical, acoustics, hazardous materials, and technology infrastructure.



Figure 1: Aerial view of Lincoln Middle School



Approach and Methodology

A facility condition assessment evaluates each building's overall condition. Two components of the facility condition assessment are combined to total the cost for facility need. The two components of the facility condition assessment are current deficiencies and life cycle forecast.

Current Deficiencies: Deficiencies are items in need of repair or replacement as a result of being broken, obsolete, or beyond useful life. The existing deficiencies that currently require correction are identified and assigned a priority. An example of a current deficiency might include a broken lighting fixture or an inoperable roof top air conditioning unit.

Life Cycle Forecast: Life cycle analysis evaluates ages of a building's systems to forecast system replacement as they reach the end of serviceable life. An example of a life cycle system replacement is a roof with a 20-year life that has been in place for 15 years and may require replacement in five years.

Discipline Specialists

All assessment teams produced current deficiencies associated with each school. The assessment for the school facilities at the Rhode Island Department of Education included several specialties:

Facility Condition Assessment: Architectural, mechanical, and electrical engineering professionals observed conditions via a visual observation that did not include intrusive measures, destructive investigations, or testing. Additionally, the assessment incorporated input provided by district facilities and maintenance staff where applicable. The assessment team recorded existing conditions, identified problems and deficiencies, documented corrective action and quantities, and identified the priority of the repair in accordance with parameters defined during the planning phase. The team took digital photos at each school to better identify significant deficiencies.

Technology: Technology specialists visited RIDE facilities and met with technology directors to observe and assess each facility's technology infrastructure. The assessment included network architecture, major infrastructure components, classroom instructional systems, necessary building space and support for technology. The technology assessment took into account the desired technology outcome and best practices and processes to ensure results can be attained effectively.

Hazardous Materials: Schools constructed prior to 1990 were assessed by specialists to identify the presence of hazardous materials. The team focused on identifying asbestos containing building materials (ACBMs), lead-based painted (LBP) areas, polychlorinated biphenyls (PCBs), and chlorofluorocarbons (CFCs). As part of an indoor air and exterior air quality assessment, the team noted evidence of mold, water intrusion, mercury, and oil and hazardous materials (OHMs) exposure. If sampling and analysis was required, these activities were recommended but not included in the scope of work.

Traffic: A traffic specialist performed an in-office review of aerial imagery of the traffic infrastructure around the facilities in accordance with section 1.05-7 in the Rhode Island School Construction Regulations and reviewed data collected on site during the facility condition assessment. Based on this information, deficiencies and corrective actions were identified. High problem areas were identified for consideration of more detailed site-specific study and analysis in the future.

Acoustics: Specialists assessed each school's acoustics, including architectural acoustics, mechanical system noise and vibration, and environmental noise. The assessment team evaluated room acoustics with particular attention to the intelligibility of speech in learning spaces, interior and exterior sound isolation, and mechanical system noise and vibration control.

Educational Program Space Assessment: Teams evaluated schools to ensure that that all spaces adequately support the districts educational program. Standards are established for each classroom type or instructional space. Each space is evaluated to determine if it meets those standards and a listing of alterations that should be made to make the space a better environment for teaching and learning was created.



System Summaries

The following tables summarize major building systems at the Lincoln Middle School campus, identified by discipline and building.

Site

The site level systems for this campus include:

Building Envelope

The exterior systems for the building(s) at this campus includes:

The roofing for the building(s) at this campus consists of:

Interior

The interior systems for the building(s) at this campus include:

Mechanical

The mechanical systems for the building(s) at this campus include:

Plumbing

The plumbing systems for the building(s) at this campus include:

Electrical

The electrical systems for the building(s) at this campus include:



Facility Deficiency Priority Levels

Deficiencies were ranked according to five priority levels, with Priority 1 items being the most critical to address:

Priority 1 – Mission Critical Concerns: Deficiencies or conditions that may directly affect the school's ability to remain open or deliver the educational curriculum. These deficiencies typically relate to building safety, code compliance, severely damaged or failing building components, and other items that require near-term correction. An example of a Priority 1 deficiency is a fire alarm system replacement.

Priority 2 – Indirect Impact to Educational Mission: Items that may progress to a Priority 1 item if not addressed in the near term. Examples of Priority 2 deficiencies include inadequate roofing that could cause deterioration of integral building systems, and conditions affecting building envelopes, such as roof and window replacements.

Priority 3 – Short-Term Conditions: Deficiencies that are necessary to the school's mission but may not require immediate attention. These items should be considered necessary improvements required to maximize facility efficiency and usefulness. Examples of Priority 3 items include site improvements and plumbing deficiencies.

Priority 4 – Long-Term Requirements: Items or systems that may be considered improvements to the instructional environment. The improvements may be aesthetic or provide greater functionality. Examples include cabinets, finishes, paving, removal of abandoned equipment, and educational accommodations associated with special programs.

Priority 5 – Enhancements: Deficiencies aesthetic in nature or considered enhancements. Typical deficiencies in this priority include repainting, replacing carpet, improved signage, or other improvements to the facility environment.



Facility Condition Assessment

Lincoln - Lincoln Middle School

The following chart summarizes this site's current deficiencies by building system and priority. The listing details current deficiencies including deferred maintenance, functional deficiencies, code compliance, capital renewal, hazardous materials and technology categories.

Table 1: System by Priority

System	Priority					Total	% of Total
	1	2	3	4	5		
Site	-	-	-	\$28,329	\$2,751,982	\$2,780,310	82.54 %
Roofing	-	-	-	-	-	\$0	0.00 %
Structural	-	-	-	-	-	\$0	0.00 %
Exterior	-	-	-	-	-	\$0	0.00 %
Interior	-	-	-	-	\$6,912	\$6,912	0.21 %
Mechanical	-	-	-	\$21,838	-	\$21,838	0.65 %
Electrical	\$12,625	-	-	-	\$100,556	\$113,181	3.36 %
Plumbing	-	-	-	-	\$37,007	\$37,007	1.10 %
Fire and Life Safety	\$186,742	-	-	-	-	\$186,742	5.54 %
Technology	-	-	\$16,997	-	-	\$16,997	0.50 %
Conveyances	-	-	-	-	-	\$0	0.00 %
Specialties	-	-	\$13,598	\$93,410	\$98,584	\$205,592	6.10 %
Total	\$199,367	\$0	\$30,595	\$143,576	\$2,995,041	\$3,368,580	

*Displayed totals may not sum exactly due to mathematical rounding

The building systems with the most need include:

Site	-	\$2,780,310
Specialties	-	\$205,592
Fire and Life Safety	-	\$186,742

The chart below represents the building systems and associated deficiency costs.

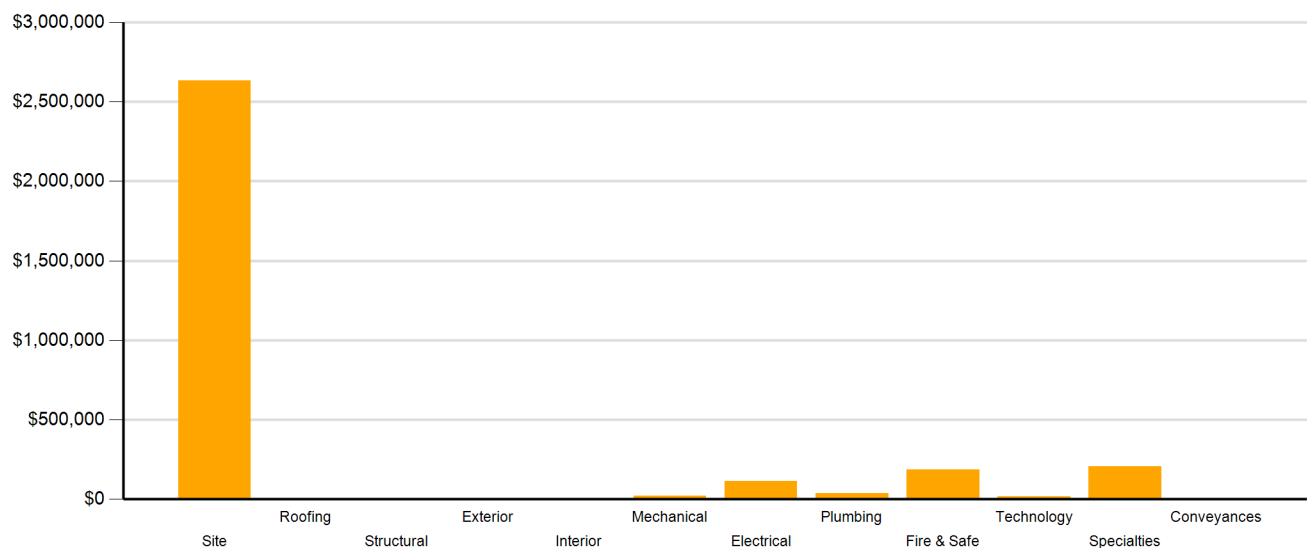


Figure 2: System Deficiencies



Current Deficiencies by Category

Deficiencies have been further grouped according to the observed category.

- **Acoustics** deficiencies relate to room acoustics, sound insulation, and mechanical systems and vibration control modeled after ANSI/ASA Standard S12.60-2010 and ASHRAE Handbook, Chapter 47 on Sound and Vibration Control.
- **Barrier to Accessibility** deficiencies relate to the Americans with Disabilities Act and the Rhode Island Governors Commission on Disability. Additional items related to accessibility may be included other categories.
- **Capital Renewal** items have reached or exceeded serviceable life and require replacement. These are current and do not include life cycle capital renewal forecasts. Also included are deficiencies correcting planned work postponed beyond its regular life expectancy.
- **Code Compliance** deficiencies related to current codes. Many may fall under grandfather clauses, which allow buildings to continue operating under codes effective at the time of construction. However, there are instances where the level of renovation requires full compliance which are reflected in the master plan.
- **Educational Adequacy** deficiencies identify where facilities do not align with the Basic Education Program and the RIDE School Construction Regulations.
- **Functional Deficiencies** are deficiencies for components or systems that have failed before the end of expected life or are not the right application, size, or design.
- **Hazardous Materials** include deficiencies for building systems or components containing potentially hazardous material. The team focused on identifying asbestos containing building materials (ACBMs), lead based painted (LBP) areas, polychlorinated biphenyls (PCBs), and chlorofluorocarbons (CFCs). As part of an indoor air and exterior air quality assessment, the team noted evidence of mold, water intrusion, mercury, and oil and hazardous materials (OHMs) exposure. With other scopes of work there may be other costs associated with hazardous materials.
- **Technology** deficiencies relate to network architecture, technology infrastructure, classroom systems, and support. Examples of technology deficiencies include: security cameras, secure electronic access, telephone handsets, and dedicated air conditioning for telecommunication rooms.
- **Traffic** deficiencies relate to vehicle or pedestrian traffic, such as bus loops, crosswalks, and pavement markings.



Facility Condition Assessment

Lincoln - Lincoln Middle School

The following chart and table represent the deficiency category by priority. This listing includes current deficiencies for all building systems.

Table 2: Deficiency Category by Priority

Category	Priority					Total
	1	2	3	4	5	
Acoustics	-	-	-	-	-	\$0
Barrier to Accessibility	-	-	-	-	-	\$0
Capital Renewal	\$84,758	-	-	-	\$2,421,337	\$2,506,095
Code Compliance	-	-	-	-	-	\$0
Educational Adequacy	\$114,609	-	\$30,595	\$143,576	\$573,705	\$862,485
Functional Deficiency	-	-	-	-	-	\$0
Hazardous Material	-	-	-	-	-	\$0
Technology	-	-	-	-	-	\$0
Traffic	-	-	-	-	-	\$0
Total	\$199,367	\$0	\$30,595	\$143,576	\$2,995,041	\$3,368,580

*Displayed totals may not sum exactly due to mathematical rounding

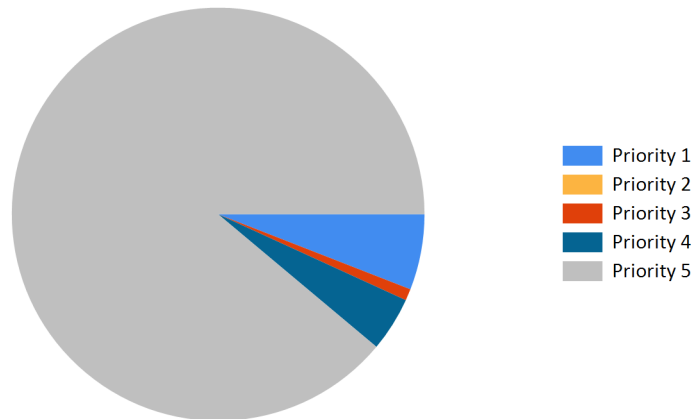


Figure 3: Current deficiencies by priority



Life Cycle Capital Renewal Forecast

During the facility condition assessment, assessors inspected all major building systems. If a need for immediate replacement was identified, a deficiency was created with the estimated repair costs. The identified deficiency contributes to the facility's total current repair costs.

Capital planning scenarios span multiple years, as opposed to being constrained to immediate repairs. Construction projects may begin several years after the initial facility condition assessment. Therefore, in addition to the current year repair costs, it is necessary to forecast the facility's future costs using a 5-year life cycle renewal forecast model.

Life cycle renewal is the projection of future building system costs based upon each individual system's expected serviceable life. Building systems and components age over time, eventually break down, reach the end of their useful lives, and may require replacement. While an item may be in good condition now, it might reach the end of its life before a planned construction project occurs.

The following chart shows all current deficiencies and the subsequent 5-year life cycle capital renewal projections. The projections outline costs for major building systems in which a component is expected to reach the end of its useful life and require capital funding for replacement.

Table 3: Capital Renewal Forecast

System	Current Deficiencies	Life Cycle Capital Renewal Projections					LC Yr. 1-5 Total	Total 5-Year Need
		Year 1 2017	Year 2 2018	Year 3 2019	Year 4 2020	Year 5 2021		
Site	\$2,780,310	\$453,858	\$453,858	\$453,858	\$453,858	\$453,858	\$2,269,290	\$5,049,601
Roofing	\$0	\$0	\$0	\$0	\$0	\$0	\$0	\$0
Structural	\$0	\$0	\$0	\$0	\$0	\$0	\$0	\$0
Exterior	\$0	\$0	\$0	\$0	\$0	\$0	\$0	\$0
Interior	\$6,912	\$0	\$0	\$0	\$0	\$0	\$0	\$6,912
Mechanical	\$21,838	\$0	\$0	\$0	\$0	\$0	\$0	\$21,838
Electrical	\$113,181	\$0	\$0	\$0	\$0	\$0	\$0	\$113,181
Plumbing	\$37,007	\$0	\$0	\$0	\$0	\$0	\$0	\$37,007
Fire and Life Safety	\$186,742	\$0	\$0	\$0	\$0	\$0	\$0	\$186,742
Technology	\$16,997	\$0	\$0	\$0	\$0	\$0	\$0	\$16,997
Conveyances	\$0	\$0	\$0	\$0	\$0	\$0	\$0	\$0
Specialties	\$205,592	\$0	\$0	\$0	\$0	\$0	\$0	\$205,592
Total	\$3,368,580	\$453,858	\$453,858	\$453,858	\$453,858	\$453,858	\$2,269,290	\$5,637,870

*Displayed totals may not sum exactly due to mathematical rounding


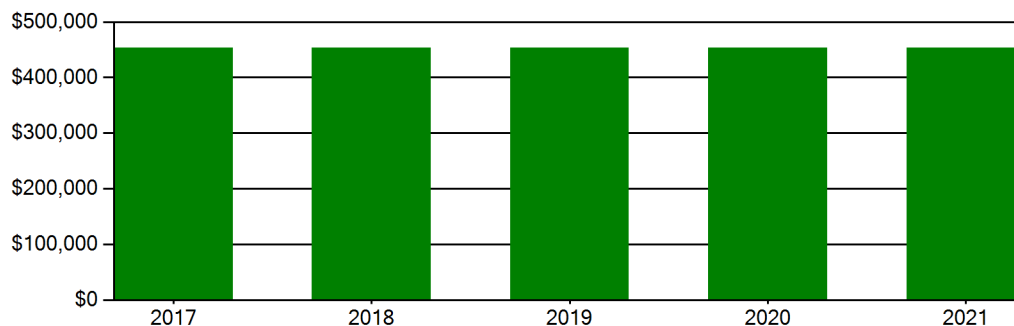


Figure 4: Life Cycle Capital Renewal Forecast



Facility Condition Index (FCI)

The Facility Condition Index (FCI) is used throughout the facility condition assessment industry as a general indicator of a building's health. Since 1991, the facility management industry has used an index called the FCI to benchmark the relative condition of a group of schools. The FCI is derived by dividing the total repair cost, including educational adequacy and site-related repairs, by the total replacement cost. A facility with a higher FCI percentage has more need, or higher priority, than a facility with a lower FCI. It should be noted that costs in the New Construction category are not included in the FCI calculation.



Financial modeling has shown that over a 30-year period, it is more cost effective to replace than repair schools with a FCI of 65 percent or greater. This is due to efficiency gains with facilities that are more modern and the value of the building at the end of the analysis period. It is important to note that the FCI at which a facility should be considered for replacement is typically debated and adjusted based on property owners and facility managers approach to facility management. Of course, FCI is not the only factor used to identify buildings that need renovation, replacement, or even closure. Historical significance, enrollment trends, community sentiment, and the availability of capital are additional factors that are analyzed when making school facility decisions.

For master planning purposes, the total current deficiencies and the first five years of projected life cycle needs were combined. This provides an understanding of the current needs of a facility as well as the projected needs in the near future. A 5-year FCI was calculated by dividing the 5-year need by the total replacement cost. Costs associated with new construction are not included in the FCI calculation.

The replacement value represents the estimated cost of replacing the current building with another building of like size, based on today's estimated cost of construction in the Providence, Rhode Island area. The estimated replacement cost for this facility is \$45,385,888. For planning purposes, the total 5-year need at the Lincoln Middle School is \$5,496,335 (Life Cycle Years 1-5 plus the FCI deficiency cost). The Lincoln Middle School facility has a 5-year FCI of 12.42%.

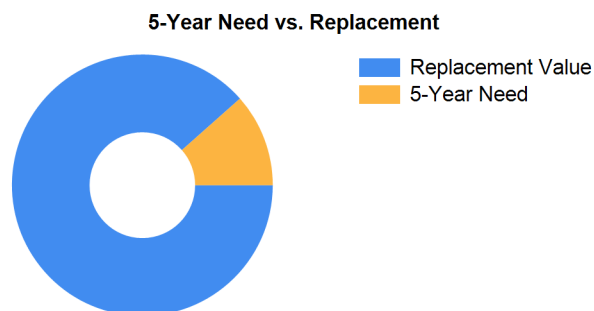


Figure 5: 5-Year FCI

It is important to reiterate that this FCI replacement threshold is not conclusive, but is intended to initiate planning discussion in which other relevant issues with regard to a facility's disposition must be incorporated. This merely suggests where conversations regarding replacement might occur.



Rhode Island Aspirational Capacity

The capacity of a school reflects how many students the school's physical facility can effectively serve. There are various methodologies that exist to calculate capacity. It is not uncommon to review an existing building only to find that the capacity that had once been assigned is greater than what can be reasonably accommodated today. This is primarily because of a change in how programs are delivered.

The Rhode Island Aspirational Capacity is based on the Rhode Island School Construction Regulations (SCRs) and is an aspirational goal of space use. The capacity for each individual public school in the state of Rhode Island was designed to conform to Section 1.06-2 Space Allowance Guidelines of the Rhode Island Department of Education (RIDE) SCRs. These regulations outline the allowed gross square feet (GSF) per student at each school type (ES, MS, HS) by utilizing a sliding scale based on projected enrollment. The resulting capacities reflect how school capacities align to the SCRs for new construction. The existing enrollment was multiplied by the GSF per student for the appropriate bracket. For the purposes of this analysis, Pre-K centers were rolled into the elementary totals, and K-8 facilities were counted as middle schools.

The most consistent and equitable way a state can determine school capacities across a variety of districts and educational program offerings is to use square-foot-per-student standards. In contrast, in the 2013 Public Schoolhouse Assessment Report, LEAs self-reported capacities for their elementary, middle and high schools. Districts typically report "functional capacity," which is defined as the number of students each classroom can accommodate. Functional capacity counts how many students can occupy a space, not how much room students and teachers have within that space. For example, a 650-square-foot classroom and a 950-square-foot classroom can both have a reported capacity of 25 students, but the actual teaching and learning space per student varies greatly.

The variation in square feet per student impacts the kinds of teaching practices possible in each space. The lowest allocation of space per student restricts group and project-based learning strategies and requires teachers to teach in more traditional, lecture-style formats, due to a lack of space. Furthermore, the number of students that can be accommodated in a classroom does not account for access to sufficient common spaces such as libraries, cafeterias, and gymnasiums. When cafeterias are undersized relative to the population, schools must host four or more lunch periods a day, resulting in some students eating lunch mid-morning and some mid-afternoon. Similarly, undersized libraries and gymnasiums create scheduling headaches for schools and restrict student access. Finally, a classroom count-only approach to school capacity does not consider the inherent scheduling challenges schools face.

Applying the Rhode Island Aspirational Capacity, a facility of this size could ideally support an enrollment of approximately 756 students.

Facility New Construction

As part of the Educational Program Space Assessment, select core spaces were compared to the RI School Construction Regulations. If it was determined that a facility was in need of square footage related to a cafeteria or library/media center, a cost for additional space was estimated. This cost is not included in the total 5-year need or the 5-year FCI calculation.

The New Construction cost to bring the Lincoln Middle School cafeteria and/or library/media center to the size prescribed by the SCRs is estimated to be \$1,146,539.



Summary of Findings

The Lincoln Middle School comprises 137,533 square feet and was constructed in 2006. Current deficiencies at this school total \$3,227,045. Five year capital renewal costs total \$2,269,290. The total identified need for the Lincoln Middle School (current deficiencies and 5-year capital renewal costs) is \$5,496,335. The 5-year FCI is 12.42%.

Table 4: Facility Condition by Building

	Gross Sq Ft	Year Built	Current Deficiencies	LC Yr. 1-5 Total	Total 5 Yr Need (Yr 1-5 + Current Defs)	5-Year FCI
Lincoln Middle School Totals	137,533	2006	\$3,227,045	\$2,269,290	\$5,496,335	12.42%

**Displayed totals may not sum exactly due to mathematical rounding*

The following pages provide a listing of all current deficiencies and 5-year life cycle need and the associated costs, followed by photos taken during the assessment.

Cost Estimating

Cost estimates are derived from local cost estimating expertise and enhanced by industry best practices, historical cost data, and relevance to the Rhode Island region. Costs have been developed from current market rates as of the 2nd quarter in 2016. All costs are based on a replace-in-kind approach, unless the item was not in compliance with national or state regulations or standards.

For planning and budgeting purposes, facility assessments customarily add a soft cost multiplier onto deficiency repair cost estimates. This soft cost multiplier accounts for costs that are typically incurred when contracting for renovation and construction services. Soft costs typically include construction cost factors, such as contractor overhead and profit, as well as labor and material inflation, professional fees, and administrative costs. Based on the Rhode Island School Construction Regulations, a soft cost multiplier of 20% is included on all cost estimates. Other project allowances are included in the cost estimates based on school attributes such as age, location, and historic designation. All stated costs in the assessment report will include soft costs for planning and budgeting purposes. These are estimates, and costs will vary at the time of construction.

LEA Feedback

As part of the assessment process, LEAs were given several opportunities to provide feedback on the data. Jacobs performed a thorough review of the comments provided relating to the Facilities Condition Assessment. Based on information provided, some adjustments were made to improve or refine the dataset. In other situations, enough information was not provided, item was out of scope, or evidence provided by assessment team did not align with the feedback and no adjustment was made. Finally, deficiency priorities, costs, and educational space/technology standards are consistent throughout the state.



Site Level Deficiencies

Site

Deficiency	Category	Qty	UoM	Priority	Repair Cost	ID
Backstops Require Replacement	Educational Adequacy	1	Ea.	4	\$28,329	28495
Note: Backstops Require Replacement						
Exterior Basketball Goals are Required	Educational Adequacy	1	Ea.	5	\$5,807	28754
Note: Exterior Basketball Goals are Required						
Maintenance allowance. Facility Condition Assessment not performed.	Capital Renewal	1	LS	5	\$2,421,337	53581
Note: Annual maintenance allowance. Condition assessment not performed.						
School lacks a competition track.	Educational Adequacy	1	Ea.	5	\$324,837	28245
Note: School lacks a competition track.						
Sub Total for System		4	items		\$2,780,310	
Sub Total for School and Site Level		4	items		\$2,780,310	

Building: 01 - Main Building

Interior

Deficiency	Category	Qty	UoM	Priority	Repair Cost	ID
Room lacks appropriate sound control.	Educational Adequacy	200	SF	5	\$6,912	Rollup
Sub Total for System		1	items		\$6,912	

Mechanical

Deficiency	Category	Qty	UoM	Priority	Repair Cost	ID
Lab lacks an appropriate fume hood.	Educational Adequacy	1	Ea.	4	\$21,838	Rollup
Sub Total for System		1	items		\$21,838	

Electrical

Deficiency	Category	Qty	UoM	Priority	Repair Cost	ID
Room last power shut-off valves for utilities	Educational Adequacy	9	Ea.	1	\$12,625	Rollup
Room Has Insufficient Electrical Outlets	Educational Adequacy	204	Ea.	5	\$100,556	Rollup
Sub Total for System		2	items		\$113,181	

Plumbing

Deficiency	Category	Qty	UoM	Priority	Repair Cost	ID
Room lacks a drinking fountain.	Educational Adequacy	5	Ea.	5	\$5,477	Rollup
The Class Room Lavatories Plumbing Fixtures Are Missing And Should Be Installed	Educational Adequacy	21	Ea.	5	\$31,530	Rollup
Sub Total for System		2	items		\$37,007	

Fire and Life Safety

Deficiency	Category	Qty	UoM	Priority	Repair Cost	ID
Emergency Lighting System Requires Replacement	Capital Renewal	101,575	SF	1	\$84,758	53545
Note: Fire Marshal requires immediate replacement of non-functioning emergency lights per Lincoln Public Schools 5 year capital plan.						
Room lacks shut-off valves for utilities. (International Fuel Gas Code, Section 409.6)	Educational Adequacy	9	Ea.	1	\$101,984	Rollup
Sub Total for System		2	items		\$186,742	

Technology

Deficiency	Category	Qty	UoM	Priority	Repair Cost	ID
Room lacks Interactive White Board	Educational Adequacy	3	Ea.	3	\$16,997	Rollup
Sub Total for System		1	items		\$16,997	

Specialties

Deficiency	Category	Qty	UoM	Priority	Repair Cost	ID
Room has insufficient writing area.	Educational Adequacy	3	Ea.	3	\$13,598	Rollup



Facility Condition Assessment

Lincoln - Lincoln Middle School

Specialties

Deficiency	Category	Qty	UoM	Priority	Repair Cost	ID
Separate Student Kitchen Stations Are Required	Educational Adequacy	1	Ea.	4	\$3,702	Rollup
Walk In Cooler/Freezer Is Required	Educational Adequacy	1	Ea.	4	\$89,708	Rollup
Room lacks an appropriate refrigerator.	Educational Adequacy	10	Ea.	5	\$84,987	Rollup
The room lacks a washer and/or dryer.	Educational Adequacy	1	Ea.	5	\$13,598	Rollup
Sub Total for System		5	items		\$205,592	
Sub Total for Building 01 - Main Building		14	items		\$588,269	
Total for Campus		18	items		\$3,368,580	

Buildings with no reported deficiencies

02 - Building-02



Lincoln Middle School - Life Cycle Summary Yrs 1-5

Site Level Life Cycle Items

Site

Uniformat Description	LC Type Description	Qty	UoM	Repair Cost	Remaining Life
Facility Maintenance	MS Annual Maintenance Allowance - 1% Replacement Value (CCI 106.7)	137,533	SF	\$453,858	1
Facility Maintenance	MS Annual Maintenance Allowance - 1% Replacement Value (CCI 106.7)	137,533	SF	\$453,858	2
Facility Maintenance	MS Annual Maintenance Allowance - 1% Replacement Value (CCI 106.7)	137,533	SF	\$453,858	3
Facility Maintenance	MS Annual Maintenance Allowance - 1% Replacement Value (CCI 106.7)	137,533	SF	\$453,858	4
Facility Maintenance	MS Annual Maintenance Allowance - 1% Replacement Value (CCI 106.7)	137,533	SF	\$453,858	5
Sub Total for System		5	items	\$2,269,292	
Sub Total for Building -		5	items	\$2,269,292	
Total for: Lincoln Middle School		5	items	\$2,269,292	



Supporting Photos



Site Aerial



Front Elevation